


Antenna Cables

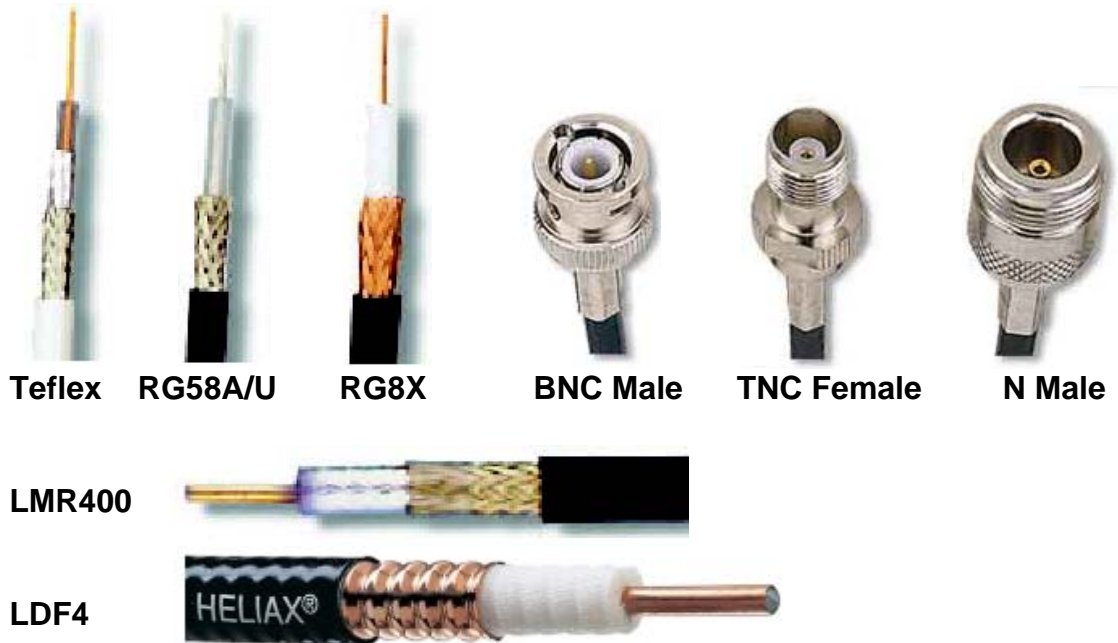

Teflex

RG58A/U

RG8X

BNC Male

TNC Female

N Male

LMR400

LDF4

Coaxial Cable Specifications

Type	Outside Diameter	Shield Cover	Center Conductor	Attenuation (dB/100 ft.)		
				150MHz	450MHz	900MHz
Teflex	0.195 inches	95% Braid 100% Foil	Solid	5.80	10.00	14.50
RG58A/U	0.193 inches	95% Braid	Stranded	6.20	12.50	20.00
RG8X	0.242 inches	95% Braid	Solid	3.60	6.80	10.70
LMR400	0.405 inches	90% Braid 100% Foil	Solid	1.50	2.70	3.90
LDF4 Helix	0.63 inches	Solid tube Semi rigid	Solid	0.815	1.45	2.1

Standard Cables

Part#	Cable Type	Length	Connectors	Attenuation (dB)		
				150MHz	450MHz	900MHz
TS0152-3B/N	Teflex	3 feet	BNC male, N male	0.7	0.8	0.9
TS0152-3B/NF	Teflex	3 feet	BNC male, N female	0.7	0.8	0.9
TS0152-3N/N	Teflex	3 feet	N male, N male	0.6	0.7	0.8
TS0153-3N/T	RG58A/U	3 feet	N male, TNC male	0.8	0.9	1.0
TS0155-10N/N	RG8X	10 feet	N male, N male	0.8	1.1	1.5
TS0155-25N/N	RG8X	25 feet	N male, N male	1.3	2.1	3.1
TS0158-25N/N	LMR400	25 feet	N male, N male	0.8	1.1	1.4
TS0158-50N/N	LMR400	50 feet	N male, N male	1.2	1.8	2.4
TS0158-100N/N	LMR400	100 feet	N male, N male	1.9	3.1	4.3
TS0159-100N/N	LDF4	100 feet	N male, N male	1.1	1.7	2.4
TS0159-200N/N	LDF4	200 feet	N male, N male	1.9	3.2	4.5

Custom cables available

